



1. 小型低背型、調整用金属ネジによる可変タイプ
2. 用途 業務用無線機、自動車電話、コードレスフォン、各種PC、AV機器他
3. 型名 5HX2

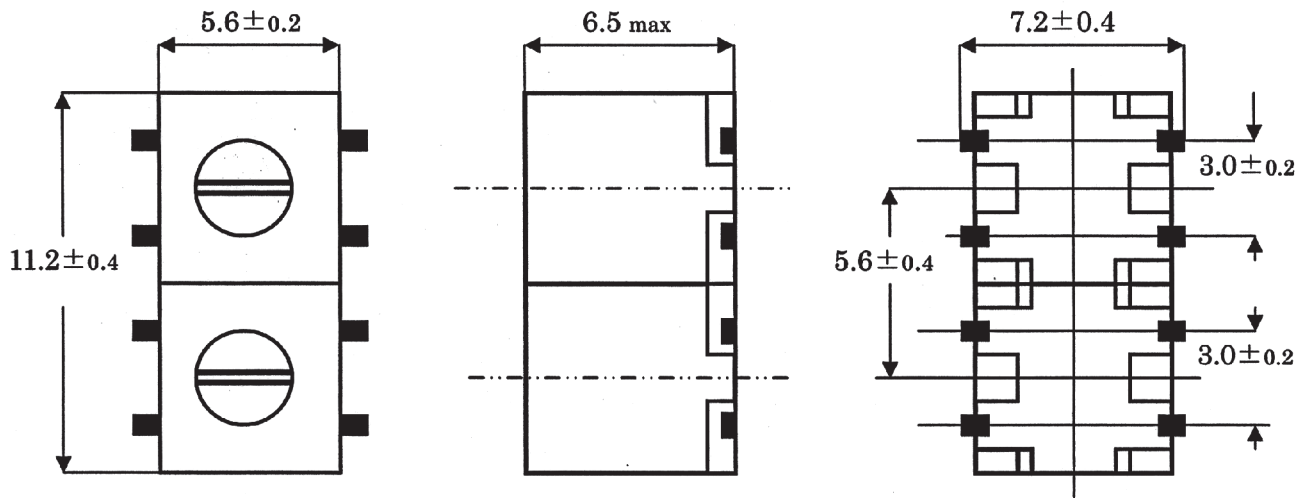

4. 接続図(裏面図)

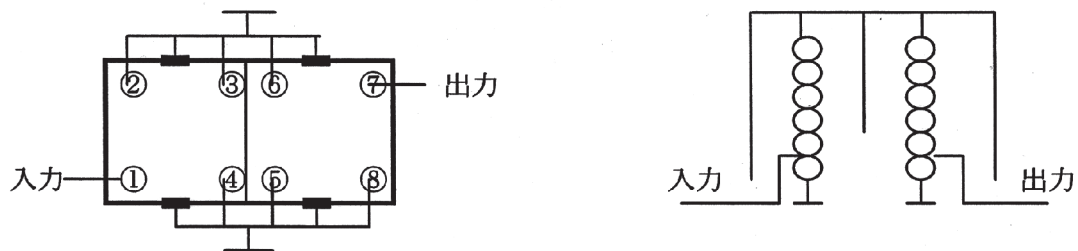

標準規格

Frequency (fo)	Insertion Loss	Band Width (1dB)	Ripple	Attenuation	
				fo-()MHz	fo+()MHz
(MHz)	(dB)	(MHz)	(dB)	(dB)	(dB)
350	6.5	6.0	1.0	16 (50)	15 (50)
400	6.0	6.0	1.0	25 (50)	20 (50)
430	5.5	6.0	1.0	25 (50)	20 (50)
435	5.5	6.0	1.0	25 (50)	20 (50)
445	5.0	6.0	1.0	25 (50)	20 (50)
500	5.0	6.0	1.0	25 (50)	15 (50)
550	5.0	6.0	1.0	25 (50)	15 (50)
600	5.0	6.0	1.0	18 (50)	13 (50)
700	5.0	6.0	1.0	16 (50)	12 (50)
800	5.0	6.0	1.0	13 (50)	12 (50)